




CPA-9000 SERIES

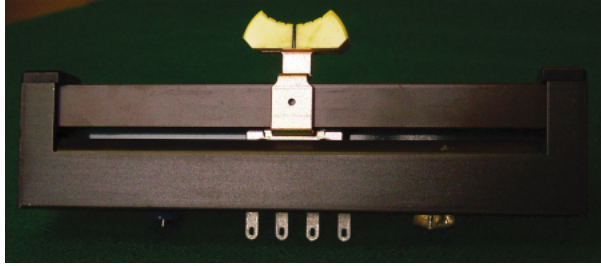

Numbering System

2 CPA-9101
2 CPA-9201

Blank: Single Unit
 2: Dual Unit


Blank: Without Micro Switch
 W: With Micro Switch

W - A 10 KΩ
W - A 10 KΩ


Total Resistance Standard 10KΩ

A: Audio Taper
 B: Linear Taper


Dimensions

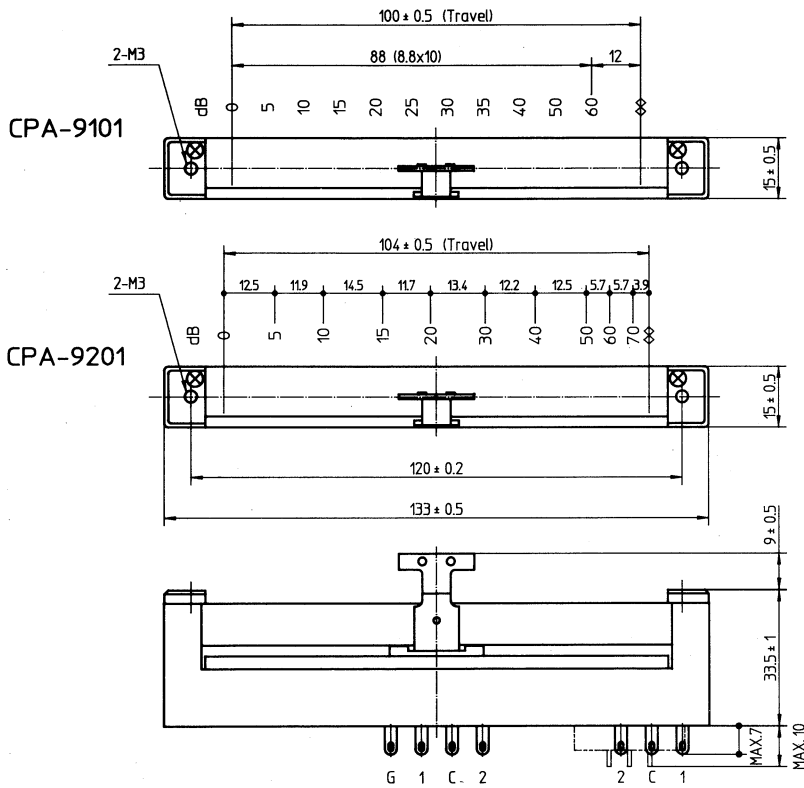

Circuits

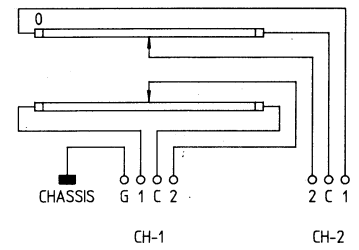

Micro-switch (option)



Specifications

Model	CPA-9101	2CPA-9101	Option
	CPA-9201	2CPA-9201	
Number of Channels (Unbalanced)	1	2	External Micro Switch
Output Law	Audio Taper or Linear Taper		Knob : CP-1 or CP-2
Total Resistance ±20%	10KΩ (standard)		Fixing Threads : M3x5
Attenuation Accuracy	0~20dB ±1.0dB (at 10dB ±0.5dB) ~40dB ±2.0dB		
Matching Accuracy	0~15dB ±0.5dB ~30dB ±1.0dB ~40dB ±2.0dB		
Insertion Loss Maximum	0.5dB		
Cut off at 15KHz Minimum	100dB		
Voltage Rating	Not to Exceed 20V DC.		
Insulation Resistance	50MΩ or More at DC 500V		